


# WPS22GRQ

## EasyLED Dart Square Bulkhead Grid Frame



### Dimensions

<b>Width (D)</b>	14" (356mm)
<b>Length (B)</b>	14" (356mm)
<b>Height (A)</b>	6 3/4" (171mm)

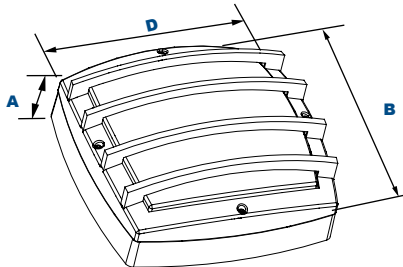

### Project Information:

Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

The LEPG Square Dart Round Bulkhead is designed to replace HID lighting systems up to 100w MH or HPS. The grid frame helps protect the UV-stabilized polycarbonate lens and adds a decorative appearance. Typical applications include office and public buildings, condominiums, schools, shopping malls, and hospitality. Recommended mounting heights are 8 to 20 feet.

### Specifications and Features:

#### Housing:

Die Cast Aluminum Housing & Grid Front Frame, Gasketed

#### Listing & Ratings:

ETL: Listed for Wet Locations, Wall Mount Only, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment.

#### Finish:

Textured Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

#### Lens:

SoftLED LumaLens UV-Stabilized Polycarbonate Opal Vandal-Resistant Lens Eliminates LED Hot Spots

#### Mounting Options:

Surface Mount

#### EasyLED LED:

Aluminum Boards

#### Wattage:

Array: 22.7w, System: 27.2w; (100w HID Equivalent)

#### Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 2kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### Warranty:

5-Year Warranty for -40°C to +40°C Environment.

### Certification & Listings:



SoftLED


Order Information Example:			WPS22GRQF1X23U5KLZSF				
WPS22GRQ	F	1X23		5K	L		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
WPS22GRQ= EasyLED Dart Square Bulkhead Grid Frame	F=Type IV	1X23=23w	U=120-277V H=347-480V	5K=5000K	L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Array Lens	Z=Bronze W=White C=Custom (Consult Factory)	SF=Single Fuse* DF=Double Fuse* BU=Battery Backup, 90 Minutes* BUC=Cold Start Battery Backup, -20°C, 90 Minutes* **120-277V Models Only.

### Accessories & Replacement Parts:

**Replacement Parts (Order Separately, Field Installed)**

For Replacement Battery Backup, see the LEPG LED Battery Backup Specification Sheet.

### Photometric Data

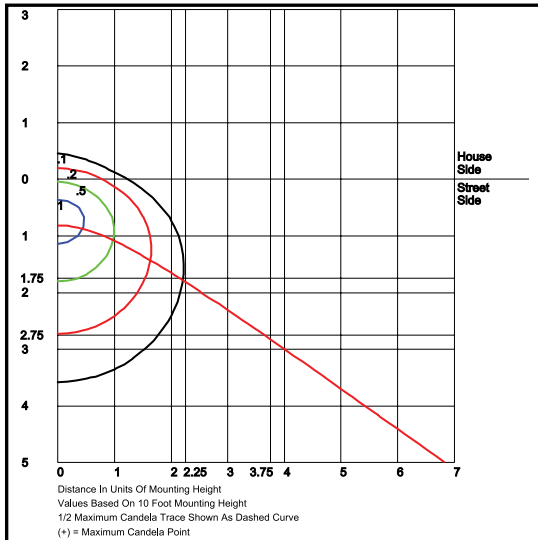

WPS22GRQF1X23U5K  
Type IV  
Grid in MH  
MH=10 Feet

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI				
				Lumens	LPW	B	U	G
EasyLED 23w	525	27	Type IV	1,800	67	0	4	2